


XGS-2610TS L2+ Managed 10GbE Switch

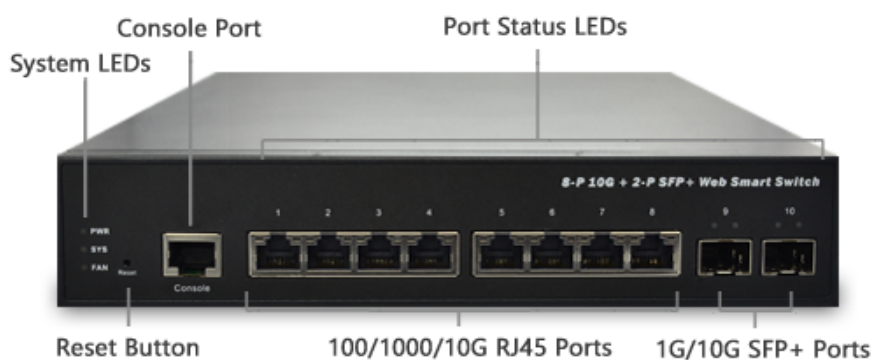

Overview

XGS-2610TS L2+ Managed Switch is a next-generation 10GbE Ethernet Switch offering full suite of L2 features and comprehensive 10GbE connections, including advanced L3 features such as Static Route that delivers better cost performance and lower *total cost of ownership* in Enterprise of backbone networks via fiber or copper connections.

XGS-2610TS delivers 8 GbE/10G RJ45 ports, 2 GbE/10G SFP+ ports and RJ45 Console port. It provides higher bandwidth and reliability for SMB and enterprise applications

XGS-2610TS is ideal to deliver management simplicity, optimum user experience, and lower total cost of ownership. The embedded Device Managed System is designed to be extremely easy-to-use/manage/install backbone networks for Enterprise Applications.

Key Features

- L2+ Managed features provide easier manageability, robust security and QoS.
- DHCP Server
- IPv4 L3 static route
- IEEE 802.3az EEE Energy Efficient Ethernet standard for green Ethernet

Benefits

- Feature-rich Ethernet Switch for Enterprise-class

The switch delivers advanced functionality in L2+ managed switch including Layer 3 static route IPv6 support, LLDP, etc. It also has comprehensive security features such as IP source guard and storm control guard your network from unauthorized access.

It helps users to build on the market-leading price/performance with L2+ Managed GbE switch, and provide secure, reliable and ease of use for enterprise and SMB deployments.

- Lower Total Cost of Ownership (TCO) with Energy-efficient Design

It is designed to help customers to reduce power consumption and lower the TCO by Energy Efficient Ethernet (IEEE 802.3az) features. It can be used for customers to build a green Ethernet networking environment.

Specifications

Port Configuration

Total Ports	Dominant Port		Uplink Port		Console
	RJ45 100M/1G/10G	SFP+ 1G/10G	RJ45 100M/1G/10G	SFP+ 1G/10G	
10	8	--	--	2	RJ45

Hardware Performance

Forwarding Capacity	Switching Capacity	Mac Table	Jumbo Frames
148.8 Mpps	200 Gbps	16 K	9216 Bytes

Environmental Range

Operating Temperature		Storage Temperature		Altitude	
Fahrenheit	Centigrade	Fahrenheit	Centigrade	Feet	Meters
14 to 122	-10 to 50	-4 to 158	-20 to 70	< 10000	< 3000

Dimension, Weights, Humidity

Dimension (WxHxD)		Weight		Operating Humidity
Millimeter	Inches	Kilograms	Pounds	
220 x 44 x 242	8.66 x 1.73 x 9.5	1.9	4.19	10% to 90% non-condensing

Voltage/Frequency, Acoustic, and Compliance Information

FAN	Voltage/Frequency	Acoustic	Certification
2	90~264V / 50~60 Hz	< 42db at 25°C (refer to ISO 7779)	CE, FCC Class A Others by Request

Software Features

Layer 2 Switching	
Spanning Tree Protocol (STP)	<ul style="list-style-type: none"> • Standard Spanning Tree 802.1d • Rapid Spanning Tree (RSTP) 802.1w • Multiple Spanning Tree (MSTP) 802.1s
Trunking	<ul style="list-style-type: none"> • Link Aggregation Control Protocol (LACP) IEEE 802.3ad • Static aggregation
VLAN	Supports up to 4K VLANs simultaneously (out of 4096 VLAN IDs) <ul style="list-style-type: none"> • Port-based VLAN • 802.1Q tag-based VLAN • MAC-based VLAN • Management VLAN • Private VLAN Edge (PVE) • Protocol-based VLAN • Voice VLAN • Guest VLAN • Q-in-Q (double tag) VLAN • GARP VLAN Registration Protocol (GVRP) • MVR (Multicast VLAN)
IGMP v1/v2/v3 Snooping	IGMP limits bandwidth-intensive multicast traffic to only the requesters. Supports 1024 multicast groups
MLD v1/v2 Snooping	Delivers IPv6 multicast packets only to the required receivers
Layer 3 Switching	
IPv4 Static Routing	IPv4 Unicast: Static routing
ARP	<ul style="list-style-type: none"> • Static ARP • ARP inspection
Security	
Secure Shell (SSH)	SSH secures Telnet traffic in or out of the switch, SSH v1 and v2 are supported
Secure Sockets Layer (SSL)	SSL encrypts the http traffic, allowing advanced secure access to the browser-based management GUI in the switch
IEEE 802.1X	<ul style="list-style-type: none"> • IEEE802.1X: RADIUS authentication, authorization and accounting, MD5 hash, guest VLAN, single/multiple host mode and single/multiple sessions • Supports IGMP-RADIUS based 802.1X • Dynamic VLAN assignment
Port Security	Locks MAC addresses to ports, and limits the number of learned MAC address
IP Source Guard	Prevents illegal IP address from accessing to specific port in the switch
RADIUS/ TACACS+	Supports RADIUS and TACACS+ authentication. Switch as a client
Storm Control	Prevents traffic on a LAN from being disrupted by a broadcast, multicast, or unicast storm on a port

Quality of Service	
Hardware Queue	Supports 8 hardware queues
Scheduling	<ul style="list-style-type: none"> • Strict priority and weighted round-robin (WRR) • Queue assignment based on DSCP and class of service
Classification	<ul style="list-style-type: none"> • Port based • 802.1p VLAN priority based • IPv4/IPv6 precedence / DSCP based • Differentiated Services (DiffServ) • Classification and re-marking ACLs
Rate Limiting	<ul style="list-style-type: none"> • Ingress policer • Egress shaping and rate control • Per port
Management	
DHCP Server	Support DHCP server to assign IP to DHCP clients
Zero Touch Upgrade	Upgrade single switch automatically when you get notification
Remote Monitoring (RMON)	Embedded RMON agent supports RMON groups 1,2,3,9 (history, statistics, alarms, and events) for enhanced traffic management, monitoring and analysis
Port Mirroring	Traffic on a port can be mirrored to another port for analysis with a network analyzer or RMON probe. Up to N-1 (N is Switch's Ports) ports can be mirrored to single destination port. A single session is supported.
UPnP	The Universal Plug and Play Forum, an industry group of companies working to enable device-to-device interoperability by promoting Universal Plug and Play
s-Flow	The industry standard for monitoring high speed switched networks. It gives complete visibility into the use of networks enabling performance optimization, accounting/billing for usage, and defense against security threats

Management	
IEEE 802.1ab (LLDP)	<ul style="list-style-type: none"> • Used by network devices for advertising their identities, capabilities, and neighbors on an IEEE 802ab local area network • Support LLDP-MED extensions
Web GUI Interface	Built-in switch configuration utility for browser-based device configuration
CLI	For users to configure/manage switches in command line modes
Dual Image	Independent primary and secondary images for backup while upgrading
SNMP	SNMP version 1, 2c and 3 with support for traps, and SNMP version 3 user-based security model (USM)
Firmware Upgrade	<ul style="list-style-type: none"> • Web browser upgrade (HTTP/ HTTPS) and TFTP • Upgrade through console port as well
NTP	Network Time Protocol (NTP) is a networking protocol for clock synchronization between computer systems over packet-switched

DHCP	<ul style="list-style-type: none">• DHCP Client• DHCP Relay• DHCP Snooping• Option 82
Other Management	<ul style="list-style-type: none">• HTTP/HTTPS; SSH• Ping• Syslog• IPv6 Management